	Date: 11/10/2014 Project: Carillon Point Vault Cleaning
	Comments: All signs should conform to MUTCD specs Task: Clean Storm Water Control Structure Duration: 8 Hours Work Hours: 8AM - 5PM 9 am - 3 pm on weekdays Work will be performed along Lake Washington Blvd Lanes moved to the east and divided by cones Minimum lane widths of 11 feet will be maintained

Revisions needed
KKC 12/08/2014


1) Road Work Ahead

2) Right Lane Closed Ahead

3) Bike Lane Closed Ahead


4) Bikes Merge with Traffic

5)



Carillon Point (private road)

Sidewalk Closed

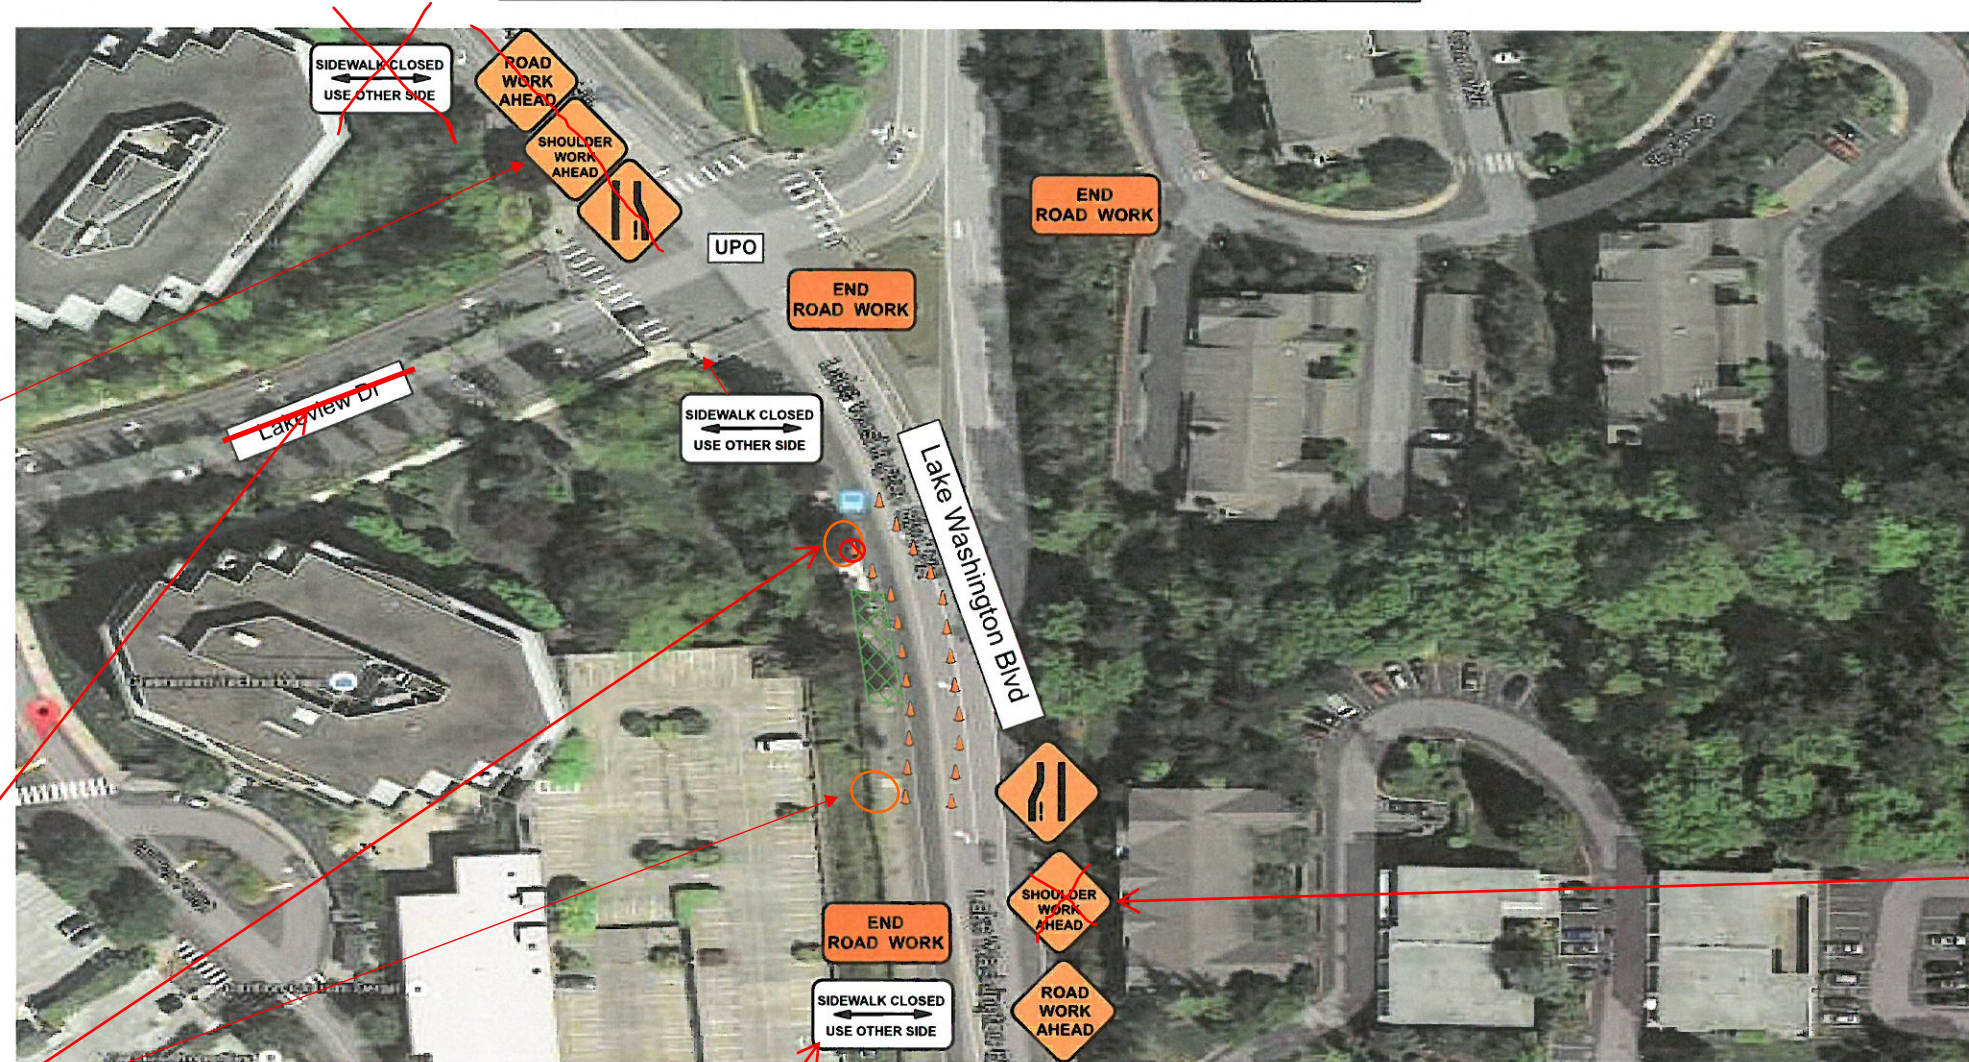

Center Lane Closed Ahead

Manifest	
22 x Cone	
2 x road work ahead W20-1	
2 x road narrows W4-2	
3 x R9-10 R9-10	
2 x Shoulder work W21-5c	
3 x KG20-2 End of road work KG20-2	

Legend	
	Work Area
	Cone

Place at Crosswalk at NE 52nd St

Table 2C-4. Guidelines for Advance Placement of Warning Signs

Posted or 85th-Percentile Speed	Advance Placement Distance ¹								
	Condition A: Speed reduction and lane changing in heavy traffic ²	Condition B: Deceleration to the listed advisory speed (mph) for the condition							
		0 ³	10 ⁴	20 ⁴	30 ⁴	40 ⁴	50 ⁴	60 ⁴	70 ⁴
20 mph	225 ft	100 ft ⁵	N/A ⁵	—	—	—	—	—	—
25 mph	325 ft	100 ft ⁵	N/A ⁵	N/A ⁵	—	—	—	—	—
30 mph	460 ft	100 ft ⁵	N/A ⁵	N/A ⁵	—	—	—	—	—
35 mph	565 ft	100 ft ⁵	N/A ⁵	N/A ⁵	N/A ⁵	—	—	—	—
40 mph	670 ft	125 ft	100 ft ⁵	100 ft ⁵	N/A ⁵	—	—	—	—
45 mph	775 ft	175 ft	125 ft	100 ft ⁵	100 ft ⁵	N/A ⁵	—	—	—
50 mph	885 ft	250 ft	200 ft	175 ft	125 ft	100 ft ⁵	—	—	—
55 mph	990 ft	325 ft	275 ft	225 ft	200 ft	125 ft	N/A ⁵	—	—
60 mph	1,100 ft	400 ft	350 ft	325 ft	275 ft	200 ft	100 ft ⁵	—	—
65 mph	1,200 ft	475 ft	450 ft	400 ft	350 ft	275 ft	200 ft	100 ft ⁵	—
70 mph	1,250 ft	550 ft	525 ft	500 ft	450 ft	375 ft	275 ft	150 ft	—
75 mph	1,350 ft	650 ft	625 ft	600 ft	550 ft	475 ft	375 ft	250 ft	100 ft ⁵